

model ev range

- Variable Speed
- Manual Control
- Reversible
- Fast Prime Switch
(except EX8000)

Compact cased pumps will provide variable speed/flow rate. Accepts different tube sizes for maximum flexibility.



model ev045

Low flow pump with easy-change tube assemblies in three sizes and four materials.

Flow rate 0-60 ml/min.



model ev500

Very popular pump with tube assemblies in four sizes and four materials.

Flow rate up to 185 ml/min.



model ev1500

Higher rate flow pump with continuous tubing in two sizes and three materials.


Flow rate up to 2570 ml/min.



model ev3000

Robust pump with thick wall tubing for viscous products in four sizes and four materials.

Flow rate up to 3850 ml/min.

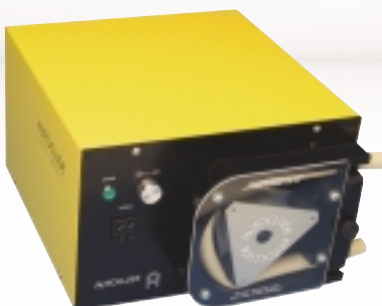

model ev8000

Robust 24-hour duty pump with excellent speed/flow rate variations and four tube material options.

Flow rate up to 8.0 L/min.

EV045 FLOW RATES ml/min

TUBE	FLOW RATE (BASED ON 2 ROLLER ROTOR)
1.6 mm	0-12 ml/min
3.2 mm	0-36 ml/min
4.0 mm	0-60 ml/min

model ev045

Tube: Autoprene, Silicone, Viton, Tygon
Supply: 110/230v, 50/60Hz, 20W
Dimensions: W 205 x H 110 x D 195mm
Weight: 1.7 kgs

EV500 FLOW RATES ml/min

TUBE	FLOW RATE (BASED ON 2 ROLLER ROTOR)
1.6 mm	2-23 ml/min
3.2 mm	5-82 ml/min
4.0 mm	7-115 ml/min
4.8 mm	11-185 ml/min

model ev500

Tube: Autoprene, Silicone, Viton, Tygon
Supply: 110/230v, 50/60Hz, 20W
Dimensions: W 205 x H 110 x D 195mm
Weight: 1.7 kgs

EV1500 FLOW RATES ml/min

TUBE	FLOW RATE
6.0 mm	190-1710 ml/min
8.0 mm	280-2570 ml/min

model ev1500

Tube: Autoprene, Silicone, Viton
Supply: 110/230v, 50/60Hz, 150W
Dimensions: W 245 x H 130 x D 225mm
Weight: 3.0 kgs

EV3000 FLOW RATES ml/min

TUBE	FLOW RATE (BASED ON 2 ROLLER ROTOR)
3.2 mm	52-585 ml/min
6.0 mm	210-1925 ml/min
8.0 mm	330-3025 ml/min
9.5 mm	420-3850 ml/min

model ev3000

Tube: Autoprene, Silicone, Viton, Tygon
Supply: 110/230v, 50/60Hz, 150W
Dimensions: W 245 x H 130 x D 225mm
Weight: 3.0 kgs

EV8000 FLOW RATES ml/min

TUBE	FLOW RATE
3.2 mm	52-585 ml/min

model ev8000

Tube: Autoprene, Silicone, Viton, Tygon
Supply: 110/230v, 50/60Hz, 150W
Dimensions: W 315 x H 213 x D 360mm
Weight: 8.0 kgs

Autoclude Ltd
Arisdale Avenue
South Ockendon
Essex
RM15 5DP
United Kingdom

Tel +44 (0)1708 856125
Fax +44 (0)1708 857366
Email info@autocludepumps.com
Web www.autocludepumps.com